




Conti Coach HA3

with Digital Tire Monitoring

With Continental, the future starts earlier. The Conti Coach HA3 delivers traction on wet surfaces when you need it most. Its custom tread design provides exceptional handling and reduced noise for serene long-distance travel.

And now, every Conti Coach HA3 tire comes equipped with an embedded TPMS sensor ready to pair with any of our digital tire monitoring solutions. Experience better tire performance as you reduce tire-related breakdowns, eliminate manual tire pressure checks, improve fuel efficiency, and extend the life of tires and casings.

Conti Coach HA3 with Embedded Sensor

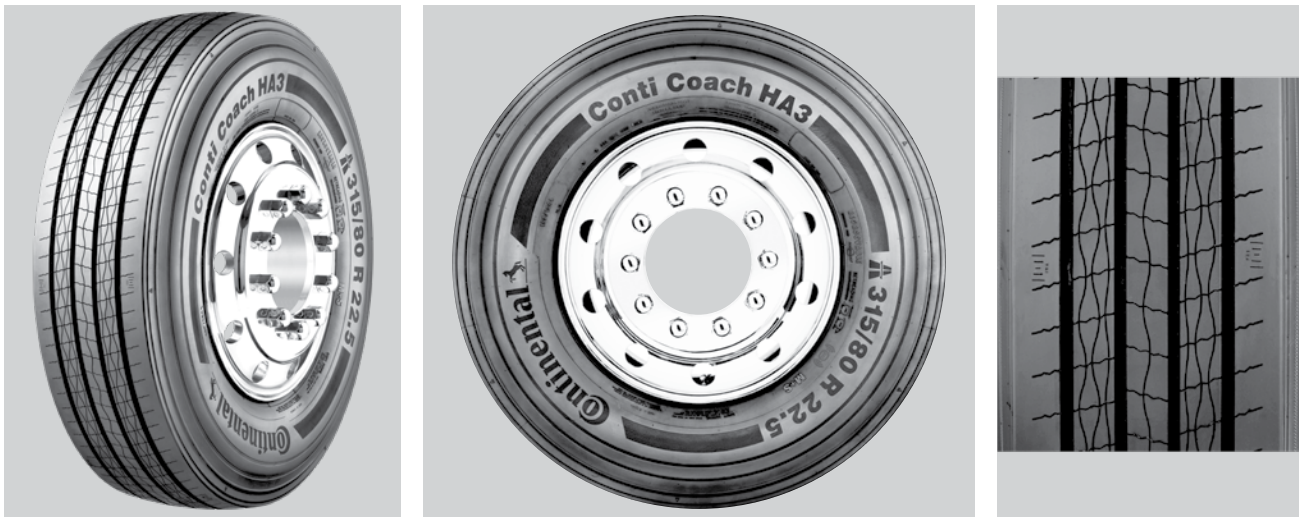

Coach All Position

Our intelligent coach tire delivers the handling and performance your fleet demands:

- Extra Load-carrying Capacity with a specially reinforced Stable bead technology.
- A Lifetime of All-Weather Traction with interlocking 3D sipes.
- Noise-Reducing Tread Design for serene and comfortable travel.
- Durable casing for premium retreadability and enhanced mileage.



Applications

Long haul, over the highway steering and all-position use, for coach and large RV use.

The Intelligent Tire Advantage

With embedded TPMS paired to our digital monitoring solutions, fleets can maintain proper tire inflation at all times, which translates into:

- Improved safety with maximum load-carrying capacity
- Reduced breakdowns & up to \$800 in related annual cost savings*
- Up to 25% longer tread life*
- Up to 1% increase in fuel efficiency*

Based upon Technology & Maintenance Council's S.2 Tire & Wheel Study Group Information Report: 2010-2 Issued: June 2010

Vocation


Bus & Coach



To get connected with one of our Digital Tire Monitoring Solutions, visit www.continental-truck.com.



ContiPressureCheck™



Embedded Tire Sensor



ContiConnect™ Yard Reader

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)#	Static Loaded Radius	Overall Inflated Diameter	Overall Inflated Width	Loaded Section Width	Approved Rim(s)	Minimum Dual Spacing	Revs Per Mile	Tire Weight	MAX. LOAD@INFLATION		
					IN (MM)	IN (MM)	IN (MM)	IN (MM)		IN (MM)	(KM)	LB (KG)	LBS PSI (KG KPa)	LBS PSI (KG KPa)	
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS															
315/80R225 *	L	056517100000	17	75	19.7 (501)	42.4 (1077)	12.4 (315)	13.6 (345)	9.00, 8.25	13.8 (351)	488 (303)	141 (64)	9090 LBS (4125 KG)	130 PSI (900 KPa)	8270 LBS (3750 KG)

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. 315/80R225 tires used on 8.25" rims are restricted to a maximum of 7610 lbs at 120 psi. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

