



Conti LAR 3 - 16"

Light Truck All-Steel Radial

When mileage is key, choose Continental. The Conti LAR 3 - 16" performs admirably in the high scrub conditions faced by regional delivery drivers, and provides industry-leading miles to removal.

The all-steel radial is designed to withstand the rigors of regional routes and speeds of more than 90 mph* under max load. And when you choose Continental, you choose a tire designed for retreading, helping lower your tire costs.

Delivering Your Lowest Overall Driving Cost. One of the largest automotive suppliers and tire manufacturers in the world, Continental develops pioneering technologies to make your trucks safer, more efficient and intelligent. With innovative tire technology and digital fleet solutions, Continental optimizes your tire lifecycle management.

Commercial Vehicle Tires | www.continental-truck.com

*Exceeding the lawful speed limit is neither recommended nor endorsed.

Conti LAR 3 - 16"

Continental's all-steel casing delivers the mileage your fleet demands:

Cut-and-chip resistant

tread compounds to withstand high scrub conditions

Optimal handling

with a pattern engineered to minimize stone retention and maximize wet traction

Fuel efficiency

coupled with industry-leading mileage


Superior retreadability

due to all-steel construction

10-ply radial


provides increased load carrying capacity and puncture resistance

32% mileage improvement over competitors*

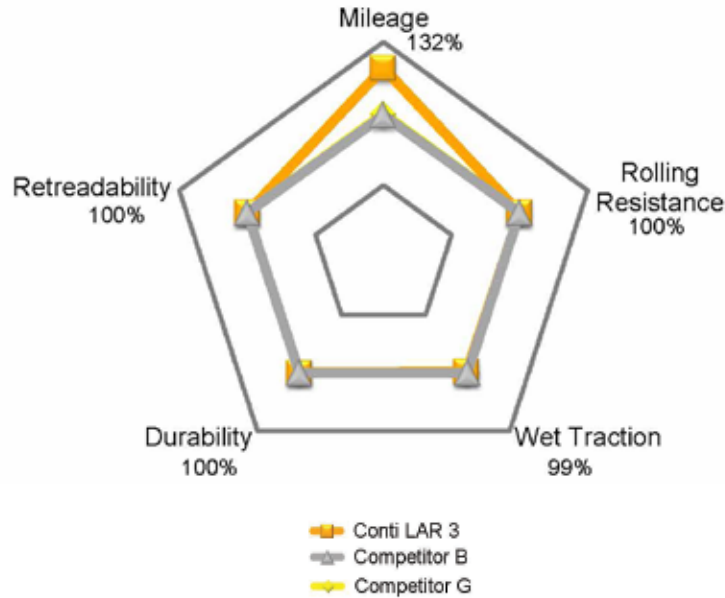

Applications
Regional haul

Position
All-position



Vocation
Light Truck

| Tire Size | Load Range | Article Number | Tread Depth (32nds) | Max Speed (MPH)# | Static Loaded Radius IN (MM) | Overall Inflated Diameter IN (MM) | Overall Inflated Width IN (MM) | Loaded Section Width IN (MM) | Approved Rim(s) | Minimum Dual Spacing IN (MM) | Revs Per Mile (KM) | Tire Weight LB (KG) | MAX. LOAD@INFLATION | |
|---|------------|----------------|---------------------|------------------|------------------------------|-----------------------------------|--------------------------------|------------------------------|-----------------|------------------------------|--------------------|---------------------|-----------------------|-----------------------|
| | | | | | | | | | | | | | LBS PSI (KG KPa) | LBS PSI (KG KPa) |
| TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS | | | | | | | | | | | | | | |
| LT225/75R16 | E | 04120950000 | 14 | 93 | 13.9 (352) | 29.7 (754) | 8.9 (225) | 9.5 (242) | 6.00 | 10.0 (254) | 697 (433) | 52 (23) | 2680 80 (1215 550) | 2470 80 (1120 550) |
| LT235/75R16 | E | 04120960000 | 14 | 93 | 14.4 (366) | 30.9 (786) | 9.9 (251) | 10.6 (270) | 7.00 | 11.0 (279) | 669 (416) | 56 (25) | 3085 80 (1400 550) | 2755 80 (1250 550) |
| LT245/75R16 | E | 04120970000 | 14 | 93 | 14.4 (366) | 30.9 (786) | 9.9 (251) | 10.6 (270) | 7.00 | 11.0 (279) | 669 (416) | 56 (25) | 3085 80 (1400 550) | 2755 80 (1250 550) |

Note - Rim listed first is the measuring rim.
Minimum Dual Spacing calculated without chains.
* - ECE Certified
- Exceeding the lawful speed limit is neither recommended nor endorsed.
Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly.
Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations.
Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

*Projected wear results based on field test data across multiple users in regional fleet application. Actual results will vary depending on several factors such as tire size, operating conditions, maintenance, road conditions and driving style.

