

# HDL2

## Fuel Efficient, Long Haul Drive

Applications: Long haul over the road drive positions.



Legend:

3G Casing	SmartWay Verified	With TPMS Sensor	Retread Available

# HDL2

Fuel Efficient, Long Haul Drive

GOODS  PEOPLE  CONSTRUCTION




## PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
11R22.5	G	05211220000	26	75	196	499	42.0	1066	11.7	296	13.1	331	8.25, 750	12.5	318	493	306	130	59	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5	H	05211230000	26	75	196	499	42.0	1066	11.7	296	13.1	331	8.25, 750	12.5	318	493	306	130	59	6610, 120 (3000, 830)	6005, 120 (2725, 830)
295/75R22.5	G	05211180000	26	75	18.9	481	40.5	1029	11.5	292	12.9	328	8.25, 900	12.5	318	511	318	122	55	6175, 110 (2800, 760)	5675, 110 (2575, 760)
295/75R22.5	H	05211210000	26	75	18.9	481	40.5	1029	11.5	292	12.9	328	8.25, 900	12.5	318	511	318	122	55	6940, 120 (3150, 830)	6395, 120 (2900, 830)
11R24.5	G	05211240000	26	75	20.5	521	44.0	1118	11.7	296	13.1	331	8.25, 750	12.5	318	470	292	141	63	6610, 105 (3000, 720)	6005, 105 (2725, 720)
11R24.5	H	05211250000	26	75	20.5	521	44.0	1118	11.7	296	13.1	331	8.25, 750	12.5	318	470	292	141	63	7160, 120 (3250, 830)	6610, 120 (3000, 830)
285/75R24.5	G	05211260000	26	75	19.5	495	41.9	1063	11.5	292	12.9	328	8.25	12.5	318	494	307	128	58	6175, 110 (2800, 760)	5675, 110 (2575, 760)
285/75R24.5	H	05211310000	26	75	19.5	495	41.9	1063	11.5	292	12.9	328	8.25	12.5	318	494	307	128	58	6780, 120 (3075, 830)	6175, 120 (2800, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. \* - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC, reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

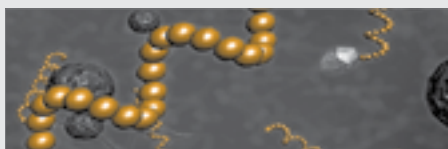

Advanced tread compounding for maximum fuel efficiency.



Innovative groove geometry minimizes stone retention.



Built on the **Conti 3G Casing** for maximum retreadability.

**Applications:** Long haul over the road drive positions.