

# HDO Off-Road Drive

Applications: Logging, mining, construction and other aggressive, off-road traction needs.



Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
---	--	---	--

**HDO**  
Off-Road Drive

 GOODS  PEOPLE  CONSTRUCTION



PRODUCT DATA




TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
11R22.5*	H	05391190000	32	68	19.7	500	42.2	1072	11.0	280	12.0	306	8.25, 750	12.5	318	490	305	124	56	6610, 120 (3000, 830)	6005, 120 (2725, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. \* - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



**Deep 32/32" tread** with cut/chip resistant tread provides excellent traction in off-road conditions.

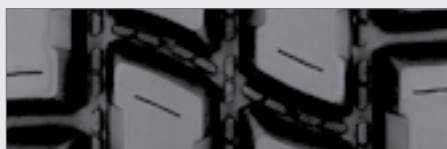

**Patented innovative groove technology** leads to minimum stone retention, extending casing life.



Sidewall profile with curb rib reduces damage from curbing, cuts and abrasions.

**Applications:** Logging, mining, construction and other aggressive, off-road traction needs.