

HDR2 Regional Drive

Applications: Regional and long haul drive positions. On/Off highway service.






Legend:

| | | | |
|-----------|-------------------|------------------|-------------------|
| 3G Casing | SmartWay Verified | With TPMS Sensor | Retread Available |
|-----------|-------------------|------------------|-------------------|

HDR2

Regional Drive

GOODS PEOPLE CONSTRUCTION

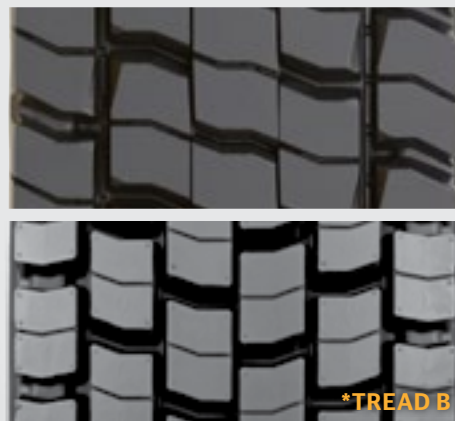

PRODUCT DATA



| TIRE SIZE | LOAD RANGE | ARTICLE NUMBER | TREAD DEPTH (32nds) | MAX SPEED (MPH) | STATIC LOADED RADIUS | | OVERALL INFLATED DIAMETER | | OVERALL INFLATED WIDTH | | LOADED SECTION WIDTH | | APPROVED RIM(S) | MINIMUM DUAL SPACING | | REVS PER UNIT | | TIRE WEIGHT | | MAX. LOAD @ INFLATION | |
|------------------------|------------|----------------|---------------------|-----------------|----------------------|-----|---------------------------|------|------------------------|-----|----------------------|-----|------------------|----------------------|-----|---------------|-----|-------------|----|-----------------------|-----------------------|
| | | | | | IN | MM | IN | MM | IN | MM | IN | MM | | IN | MM | MI | KM | LB | KG | SINGLE | DUAL |
| | | | | | LBS, PSI (KG, KPa) | | LBS, PSI (KG, KPa) | | | | | | | | | | | | | | |
| 10R22.5 | G | 05221450000 | 24 | 75 | 19.0 | 483 | 40.4 | 1026 | 10.0 | 254 | 11.0 | 278 | 7.50, 6.75, 8.25 | 11.4 | 290 | 513 | 318 | 109 | 49 | 5675, 115 (2575, 790) | 5355, 115 (2430, 790) |
| 11R22.5 | G | 05220410000 | 30 | 75 | 19.8 | 502 | 42.2 | 1071 | 11.6 | 295 | 13.0 | 330 | 8.25, 7.50 | 12.5 | 318 | 491 | 305 | 136 | 61 | 6175, 105 (2800, 720) | 5840, 105 (2650, 720) |
| 11R22.5 | H | 05220420000 | 30 | 75 | 19.8 | 502 | 42.2 | 1071 | 11.6 | 295 | 13.0 | 330 | 8.25, 7.50 | 12.5 | 318 | 491 | 305 | 137 | 62 | 6610, 120 (3000, 830) | 6005, 120 (2725, 830) |
| 12R22.5 | H | 05221270000 | 30 | 75 | 20.3 | 515 | 43.2 | 1098 | 11.9 | 301 | 13.2 | 335 | 9.00, 8.25 | 13.5 | 343 | 497 | 298 | 148 | 67 | 7390, 120 (3350, 830) | 6780, 120 (3075, 830) |
| 295/75R22.5 | G | 05220440000 | 30 | 75 | 19.0 | 483 | 40.7 | 1034 | 11.5 | 292 | 12.9 | 328 | 8.25, 9.00 | 12.5 | 318 | 509 | 316 | 128 | 58 | 6175, 110 (2800, 760) | 5675, 110 (2575, 760) |
| 295/75R22.5 | H | 05220450000 | 30 | 75 | 19.0 | 483 | 40.7 | 1034 | 11.5 | 292 | 12.9 | 328 | 8.25, 9.00 | 12.5 | 318 | 509 | 316 | 129 | 58 | 7160, 120 (3250, 830) | 6610, 120 (3000, 830) |
| 11R24.5 | H | 05220430000 | 30 | 75 | 20.6 | 524 | 44.2 | 1123 | 11.6 | 295 | 13.0 | 330 | 8.25, 7.50 | 12.5 | 318 | 468 | 291 | 147 | 66 | 7160, 120 (3250, 830) | 6610, 120 (3000, 830) |
| 285/75R24.5 | H | 05220470000 | 30 | 75 | 19.6 | 498 | 42.1 | 1069 | 11.5 | 292 | 12.9 | 328 | 8.25 | 12.5 | 318 | 492 | 306 | 135 | 61 | 6780, 120 (3075, 830) | 6175, 120 (2800, 830) |
| 315/80R22.5* (Tread B) | L | 05223660000 | 28 | 75 | 19.7 | 500 | 43.1 | 1096 | 12.3 | 312 | 12.5 | 318 | 9.00, 9.75 | 13.8 | 351 | 491 | 305 | 152 | 69 | 9090, 130 (4125, 900) | 8270, 130 (3750, 900) |

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. 315/80R22.5 tires used on 8.25" rims are restricted to a maximum of 7610 lbs at 120 psi. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Exceptional removal mileage and all-weather traction provided by **wide, open shoulder tread design**.

Optimized contour and **balanced footprint distribution** for extended tread life and product performance.



Chamfered tread block geometry to withstand higher drive axle torque with reduced drive tire wear conditions such as tearing and cracking.



Built on the **Conti 3G casing** for maximum retreadability.

Applications: Regional and long haul drive positions. On/Off highway service.