

# HSR2

## Regional All-Position

Applications: Regional hauling and on/off road, all-position.



Legend:

3G Casing	SmartWay Verified	With TPMS Sensor	Retread Available
-----------	-------------------	------------------	-------------------

# HSR2

## Regional All-Position

GOODS PEOPLE CONSTRUCTION



### PRODUCT DATA




TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
					SINGLE		DUAL														
10R22.5	G	05686570000	20	75	18.8	478	40.0	1016	10.0	254	10.8	274	7.50, 6.75, 8.25	11.4	290	518	322	105	48	5675, 115 (2575, 790)	5355, 115 (2430, 790)
11R22.5*	G	05686300000	23	75	19.4	493	41.6	1057	11.1	282	12.0	305	8.25	12.5	318	498	309	121	55	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5*	H	05686310000	23	75	19.4	493	41.6	1057	11.1	282	12.0	305	8.25	12.5	318	498	309	122	55	6610, 120 (3000, 830)	6005, 120 (2725, 830)
12R22.5	H	05120880000	23	75	20.1	511	42.9	1090	11.4	290	12.1	306	9.00, 8.25	13.5	343	482	300	133	60	7390, 120 (3350, 830)	6780, 120 (3075, 830)
275/80R22.5*	H	05686350000	23	75	18.6	472	40.0	1016	11.1	282	12.6	320	8.25	12.5	318	518	322	117	53	7160, 120 (3250, 830)	6610, 120 (3000, 830)
11R24.5*	H	05686330000	23	75	20.4	518	43.5	1105	11.1	282	12.0	305	8.25	12.5	318	476	296	130	59	7160, 120 (3250, 830)	6610, 120 (3000, 830)
285/75R24.5*	H	05687020000	23	75	19.4	493	41.3	1049	10.7	272	12.1	307	8.25	12.5	318	501	311	121	55	6780, 120 (3075, 830)	6175, 120 (2800, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. \* - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



23/32" deep **improved cut and chip resistant tread compound** for optimal performance.

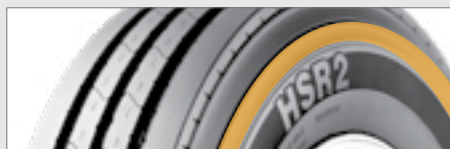

**Protective curb rib** for high scrub applications.



**Patented innovative groove technology** leads to minimum stone retention, extending casing life.

**Patented groove geometry** for better resistance to cracking and tearing.

**Applications:** Regional hauling and on/off road, all-position.