

HTL1

Fuel Efficient, Super Single Trailer

Applications: Super single fitment for long haul, trailer position in highway service.






Legend:

| | | | |
|-----------|-------------------|------------------|-------------------|
| 3G Casing | SmartWay Verified | With TPMS Sensor | Retread Available |
|-----------|-------------------|------------------|-------------------|

HTL1

Fuel Efficient, Super Single Trailer

✓ GOODS ● PEOPLE ● CONSTRUCTION

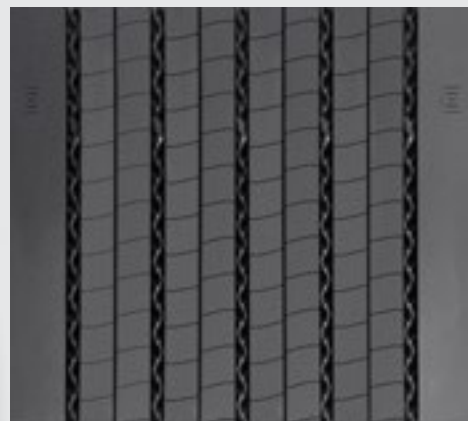

PRODUCT DATA



| TIRE SIZE | LOAD RANGE | ARTICLE NUMBER | TREAD DEPTH (32nds) | MAX SPEED (MPH) | STATIC LOADED RADIUS | | OVERALL INFLATED DIAMETER | | OVERALL INFLATED WIDTH | | LOADED SECTION WIDTH | | APPROVED RIM(S) | MINIMUM DUAL SPACING | | REVS PER UNIT | | TIRE WEIGHT | | MAX. LOAD @ INFLATION | |
|--------------|------------|----------------|---------------------|-----------------|----------------------|-----|---------------------------|-----|------------------------|-----|----------------------|-----|-----------------|----------------------|-----|---------------|-----|-------------|----|------------------------|------|
| | | | | | IN | MM | IN | MM | IN | MM | IN | MM | | IN | MM | MI | KM | LB | KG | SINGLE | DUAL |
| | | | | | LBS, PSI (KG, KPa) | | LBS, PSI (KG, KPa) | | | | | | | | | | | | | | |
| 445/50R22.5* | L | 05310000000 | 13 | 75 | 18.1 | 460 | 39.2 | 996 | 17.3 | 439 | 19.0 | 483 | 14.00 | N/A | N/A | 528 | 328 | 174 | 79 | 10200, 120 (4625, 830) | N/A |

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

* - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



13/32" tread depth minimizes irregular wear.



Shoulder defense groove provides protection against rapid shoulder wear.



Patented innovative groove technology leads to minimum stone retention, extending casing life.

Applications: Super single fitment for long haul, trailer position in highway service.