

HTR2

Regional All-Position

Applications: Local and long haul, all-position service.



Legend:

3G Casing	SmartWay Verified	With TPMS Sensor	Retread Available

HTR2

Regional All-Position

GOODS PEOPLE CONSTRUCTION



PRODUCT DATA




TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
385/65R22.5	L	05320080000	21	68	195	495	42.0	1067	14.8	376	16.3	414	11.75, 12.25	N/A	N/A	493	306	165	75	9920, 130 (4500, 900)	N/A
425/65R22.5	L	05320260000	22	68	20.3	515	44.3	1126	16.6	422	18.0	457	13.00, 14.00, 12.15	N/A	N/A	467	290	181	82	11,400, 120 (5150, 830)	N/A

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



High mileage achieved through precise balance of compound and tread geometry.

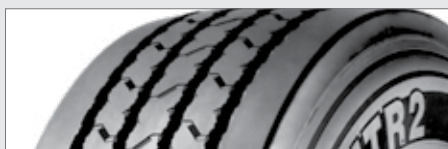

Tread pattern designed for increased stability and reduced noise.

Increased fuel efficiency due to optimized tread pattern and reduced tire weight.



Patented innovative groove technology leads to minimum stone retention, extending casing life.

Applications: Local and long haul, all-position service.