

Agricultural Tires VF TractorMaster Hybrid

- › VF Technology for about 40 percent more load at the same inflation pressure or 40 percent less inflation pressure for the same load than standard tires
- › Integrated tire sensor informs constantly on inflation pressure and tire temperature and ensures maximum tire life with the right pressure
- › Innovative tread design ensures highest mileage and comfort on the road, and high traction and fuel efficiency in the field

Application

The VF TractorMaster Hybrid was developed to especially help with agriculture contracting work. With its special tread design, it is especially suitable for on-road use. In addition, it also reduces damage in grassland applications.




Tread with large lug surface

Innovative tread design with 30 percent larger lug surface than conventional patterns for high mileage on the road and good traction on hard and normal soil



Central block band

Central block band with dissected blocks ensures good surface adaptability, and reduces noise and vibration which is especially useful for long drives on roads

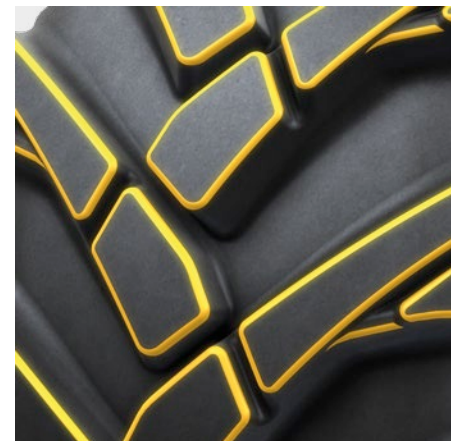

Rounded lugs

Rounded lugs reduce cutting of roots in grassland applications and minimize slippage on sandy soil - for lower fuel consumption

Tire size LI/SSY	Rim Width	Section width (mm)	Overall diameter (mm)	Loaded static radius (mm)	Rolling circum- ference (mm)	Speed Radius Index	Tire load capacity (kg) at tire pressure (bar)								Speed (km/h)
							0.4	0.6	0.8	1.0	1.2	1.4	1.6	2.0	
Advanced tire															
30 Inch							0.4	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
VF 600/70R30 NRO	21	633*	1636*	701	4772	750				3470	3895	4325	4750	5150	70
168D/165E	20	623*							3295	3760	4225	4685	5150	5600	≤ 65
	18	603*					2320	2835	3295	3760	4225	4685	5150	5600	≤ 30
42 Inch							0.4	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
VF 710/70R42	25	750*	2101*	912	6165	975				5185	5820	6460	7100	7750	70
182D/179E	24	740*							4960	5660	6355	7055	7750	8500	≤ 65
	23	730*					3490	4265	4960	5660	6355	7055	7750	8500	≤ 30

Specifications are subject to change without notice.
For further technical information, see data sheets.
For details regarding product availability, please contact your local sales representative.