



**Continental**  
The Future in Motion




# Conti CityService HA3

## Waste Transport All-Position

Continental offers the right tire for every application and type of terrain. Whether you need to take the highway, regional roads, city traffic or even venture off road, our premium tires for trucks and buses are engineered to suit your specific application needs.

# Conti CityService HA3

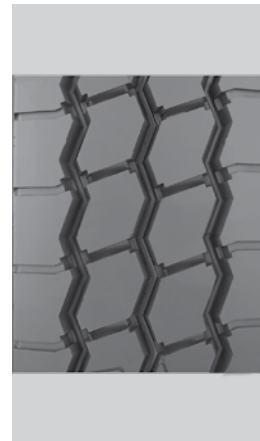

**Applications**  
Waste transportation and other high scrub, urban applications.


**Vocation**  
Waste & Refuse

## Waste Transport All-Position

- Four rib tread pattern with zigzag groove geometry for resistance to high scrub applications.
- Innovative tread compound for outstanding mileage and heat reduction.
- Improved bead design for increased durability and resistance to brake heat.
- Extra sidewall protection for better resistance to curbs, cuts, and other sidewall abrasions.

### ContiTread™

TREAD DEPTH	
<b>26/32"</b>	
TREAD WIDTH	220
	230
	240
	250
	260
	270
	280



Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)#	Static Loaded Radius IN (MM)	Overall Inflated Diameter IN (MM)	Overall Inflated Width IN (MM)	Loaded Section Width IN (MM)	Approved Rim(s)	Minimum Dual Spacing IN (MM)	Revs Per Mile (KM)	Tire Weight LB (KG)	MAX. LOAD@INFLATION			
													LBS PSI (KG KPa)	LBS PSI (KG KPa)		
<b>TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS</b>																
315/80R22.5*	L	05140590000	26	68	200 (507)	431 (1095)	12.4 (314)	13.8 (349)	9.00, 8.25	13.8 (351)	480 (298)	163 (74)	10000 (4540)	130 (900)	9090 (4125)	130 (900)

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. \* - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. 315/80R22.5 tires used on 8.25" rims are restricted to a maximum of 7610 lbs at 120 psi. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

