

ContiEarth™ Continental EM-Master E4/L4

- › Engineered for earthmoving machines like Articulated Dump Trucks and Loaders



Application

ADTs and loaders are used for transporting large quantities of bulk or aggregate material in applications like quarries; construction or mining sites. The E4/L4 version of our EM-Master series was primarily designed for conditions that range from gravelly to rocky terrain. Carcass protection, traction and a smooth ride were main criterias for the pattern development.

Continental's EM-Master is customized for these specific demands and comes with a cut resistant tread compound to master the application.


Our EM-Master is customised for these specific demands and comes with a cut resistant tread compound to master the application

Features




Tread blocks with multiple gripping edges

For powerful traction on gravelly and rocky terrain

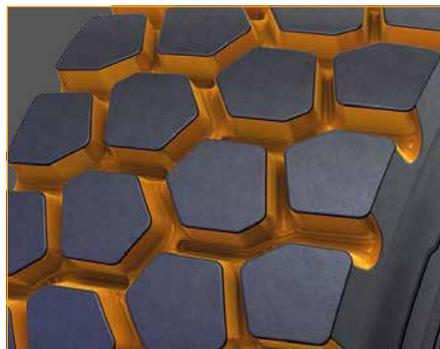

Wider blocks and therefore less void than E3/L3 version

For more carcass protection and smother running

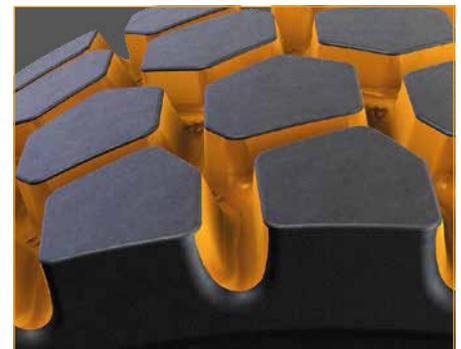

Deep tread design

For more wear volume than E3/L3 version

Ready for ContiPressureCheck™

All our radial earthmover tyres are equipped with premounted sensors which constantly monitor inflation pressure and temperature of the tyre and can transmit the information in real time to the ContiPressureCheck™ system.

For more information please check out www.continental-tyres.co.uk/specialty/solutions



EM-Master E4/L4

Article no.	Tyre size	TRA code	Type	Transport		Loader		Rim	Overall diam. mm (inch)	Overall width mm (inch)	Tread depth mm (32")
				SR / PR	LI/SS	SR / PR	LI/SS				
1270508	23.5R25	E4/L4	TL	2*	185B	1*	195A2	25x19.50/2.5	1609 (63.3)	603 (23.7)	48 (60/32)
1270506	26.5R25	E4/L4	TL	2*	193B	2*	202A2	25x22.00/3.0	1739 (68.5)	697 (27.4)	52 (66/32)
1270468	29.5R25	E4/L4	TL	2*	200B	2*	216A2	25x25.00/3.5	1850 (72.8)	760 (29.9)	59 (74/32)

SR: Star Rating for radial tyres

PR: Ply Rating for x-ply tyres

LI: Load Index

SS: Speed Symbol

All EM-Master tyres feature a cut resistant tread compound

Specifications are subject to change without notice

For further technical information, see data sheets

For details regarding product availability, please contact your local sales representative.