


Agricultural Tires CompactMaster AG



- › Loading and collecting of farm goods on field and grass land
- › Tire construction with focus on tilting stability
- › Maximum speed up to 50 km/h


Application

- › For agricultural work with telescopic handlers and compact loaders as universal vehicles on farms

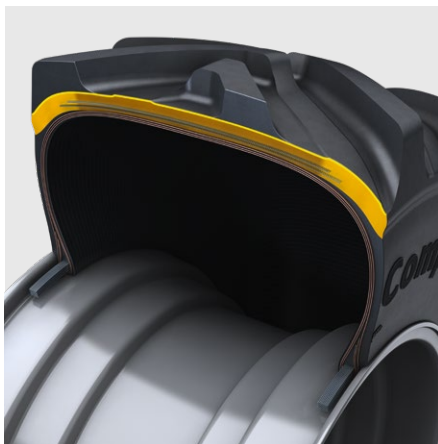

Turtle Shield Shaped Tread Base Line

Protection of the shoulder area against penetration and cuts by foreign objects

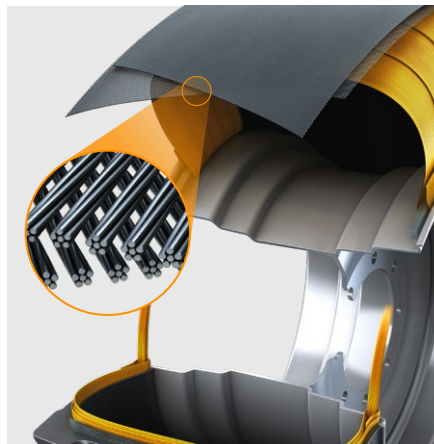

Twisted Steel Belt

High stiffness of tire in lateral direction
Protection in center area against foreign objects



Wide lugs and wide lug base

High traction on muddy grounds
Good self-cleaning behavior

Tire size LI/SSY	Rim Width	Section width (mm)	Overall diame- ter (mm)	Loaded static radius (mm)	Rolling circum- ference (mm)	Speed Radius Index	Tire load capacity (kg) at tire pressure (bar)							Speed (km/h)
							1,6	2,0	2,4	2,8	3,2	3,6	4,0	
Advanced tire														
24 Inch														
							2120	2500	2885	3270	3650	4010	4375	50
							2120	2500	2885	3270	3650	4010	4375	40
460/70R24	15	481					2240	2650	3055	3460	3870	4275	4680	30
159 A8(159B)	16	491	1244	559	3710*	600	2320	2740	3165	3585	4010	4435	4860	25
	14	471					2570	3140	3710	4280	4850	5420	5990	6560 cycl.
							3940	4815	5690	6560	7435	8310	9185	10060 stat.

* Calculated value

Specifications are subject to change without notice.

For further technical information, see data sheets.

For details regarding product availability, please contact your local sales representative.

Continental Reifen Deutschland GmbH | Commercial Specialty Tires

Büttnerstraße 25 | 30165 Hannover | T. +49 511 938-01 | mail_service@conti.de | www.continental-specialty-tires.com