


Agricultural Tires

CompactMaster EM

- › Material handling at construction sites on paved grounds, gravel and sand
- › Optimized design for easy turning on the spot on paved grounds and gravel leads to extensive lifetime
- › Maximum speed up to 50 km/h


Application

- › Focus on telehandler and compact loader applications with various intense and demanding rough operations.

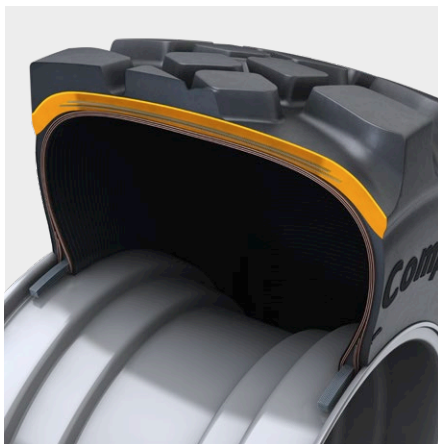

Turtle Shield Shaped Tread Base Line

Protection of the shoulder area against penetration and cuts by foreign objects

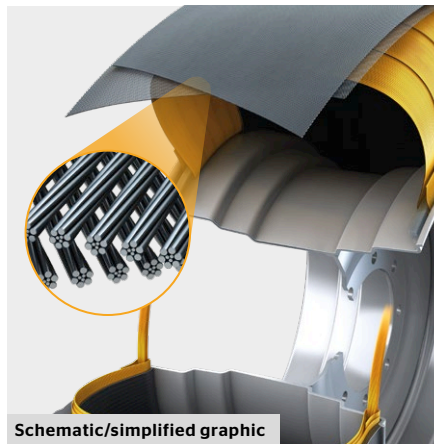

Schematic/simplified graphic

Twisted Steel Belt

High stiffness of tire in lateral direction

Protection in center area against foreign objects



High Tread Positive And Flexible Blocks

High amount of rubber volume

Finely structured blocks for easy turning on the spot

Tire size LI/SSY	Rim width	Section width (mm)	Overall diameter (mm)	Loaded static radius (mm)	Rolling circum- ference (mm)	Speed Radius Index	Tire load capacity (kg) at tire pressure (bar)								Speed (km/h)	
							1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4		
24 inch																
460/70 R 24 IND 159A8/159B	15	475	1245	556	3735*	600	2120	2500	2885	3270	3650	4010	4375		50	
							2120	2500	2885	3270	3650	4010	4375		40	
	2240	2650					3055	3460	3870	4275	4680		30			
	2320	2740					3165	3585	4010	4435	4860		25			
	2570	3140					3710	4280	4850	5420	5990	6560	10 cycl.			
	3940	4815					5690	6560	7435	8310	9185	10060	0 stat.			